


# NEW

## FC 13

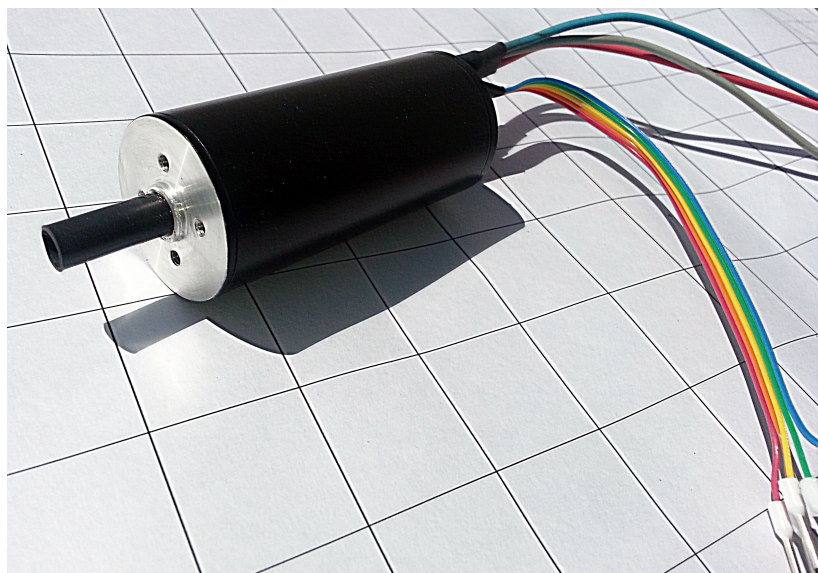

- \* Very High Speed with Low Voltage 48 VDC
- \* Small Size
- \* No cogging
- \* Light-Weight

### TECHNICAL SPECIFICATIONS

### CHARACTERISTICS


### SYMBOL

### UNITS

### FC 13

MAX SPEED	n	r.p.m	20000
STALL TORQUE (+/-10%)	Ms	Nm	0.2
STALL CURRENT (+/-10%)	Is	A	11.11
PEAK TORQUE (+/-10%)	Mj	Nm	1.2
TORQUE-WEIGHT RATIO	Tw	Nm/kg	0.77
EMF CONSTANT (+/-10%)	Ke	Vs/rad	0.018
TORQUE CONSTANT (+/-10%)	Kt	Nm/A	0.018
COGGING TORQUE	Ct	Nm	0.0
WINDING RESISTANCE (+/-10%)	R(ph-ph)	$\Omega$	0.169
WINDING INDUCTANCE (+/-10%)	L(ph-ph)	mH	0.025
ROTOR INERTIA	J	kgm <sup>2</sup> 10 <sup>-3</sup>	0.003
MECHANICAL TIME CONSTANT	Tm	ms	1.56
ELECTRICAL TIME CONSTANT	Te	ms	0.148
THERMAL RESISTANCE	Rth	°C/W	4.30
MASS	M	kg	0.26
INSULATION			class-F
PROTECTION			IP-54
MAX.WORKING TEMPERATURE		C°	155
N° of poles			4
ALUMINIUM HEAT SINK PLATE			300X300

## DRAWING

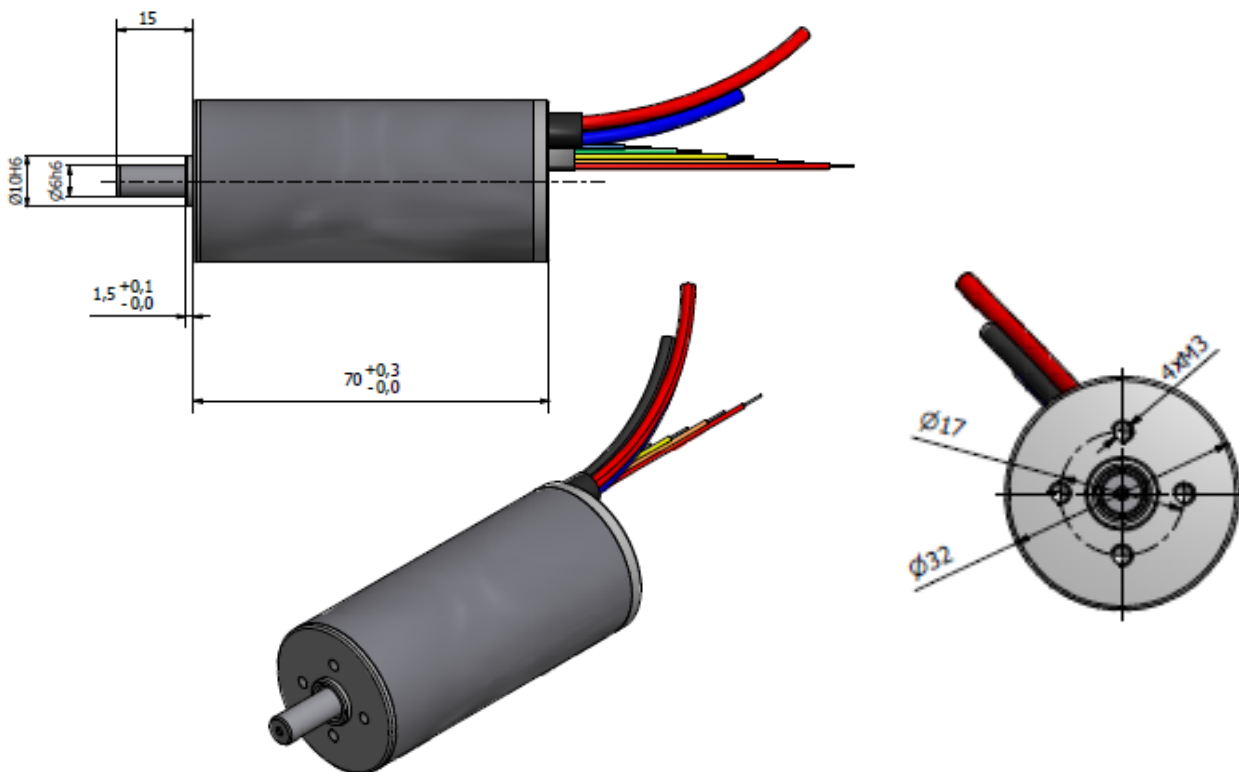

## TECHNICAL SPECIFICATIONS HALL SENSORS

SUPPLY VOLTAGE	3.8...24VDC
OUTPUT ON CURRENT	20 mA
OUTPUT OFF VOLTAGE	3.8...24VDC
OPERATING JUNCTION TEMPERATURE	-40°C to+170°C
OUTPUT RISE TIME	400 ns (Max.)
OUTPUT FALL TIME	400 ns (Max.)
MAGNETIC FIELD FREQUENCY	from DC to 10kHz

EMC corresponding to DIN 40839



DISTRIBUIDOR  
AUTORIZADO

MEX (55) 53 63 23 31 MTY (81) 83 54 10 18  
QRO (442) 1 95 72 60 ventas@industrialmagza.com