



## Enclosed UniModule Clutch/Brake Washdown Series

For Aggressive Food Processing Environments

**Long-lasting clutch/  
brake performance  
for bakeries and snack  
food applications**



Whether you clean your equipment with air, water, or a mild solution, many standard clutch/brakes may not weather the storm. If you want true clutch/brake performance, choose Warner Electric.

Our Enclosed UniModule Clutch/Brake Washdown Series (EUM-W) represents the latest in clean, quiet motion control technology. Designed for use in dusty, washdown applications such as those found in the bakery and snack food industries, these packaged clutch/brake units are totally enclosed in sealed, rugged enclosures to keep wear particles in and contaminants out.


Washdown features consist of stainless steel shafts, USDA approved coating, corrosion-resistant fasteners, and special sealing accessories, including optional conduit boxes and integral controls. Available in a wide range of sizes, all units are fully assembled, prealigned and preburnished for true out-of-the-box performance.

For Technical Assistance Call


**800-825-9050**

 **Warner**  
Electric

*An Altra Industrial Motion Company*

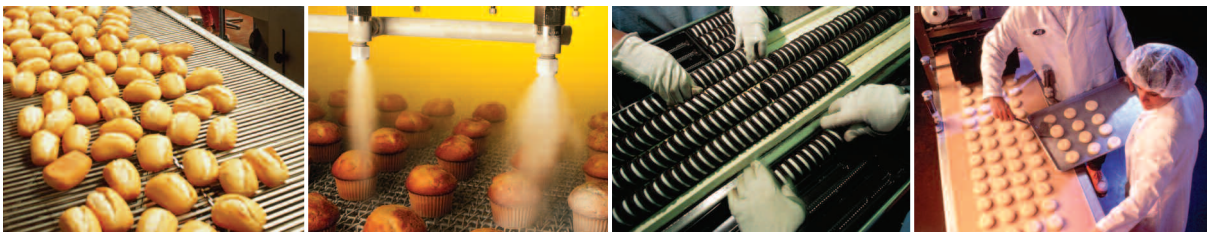

## EUM-W-1020 Motor Clutch/Brake Combination

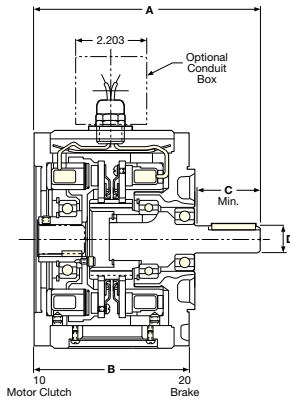

### NEMA C-face mounted units Dimensions (Inches)

UniModule Size	A	B	C	D	Overall Diameter
50	6.750	4.844	1.813	.625	6.915
100	6.750	4.844	1.890	.625	6.915
180	6.828	4.844	1.890	.875	6.915
210	8.891	5.922	2.500	1.125	10.00
215	9.391	5.922	3.000	1.375	10.00


### Available Options

- Conduit box
- Fan kit
- Integral control
- Mounting bracket

### Specifications

UniModule Model No.	Horsepower	Static Torque (lb-ft)	Cycles Per Minute Standard (@ 1750 RPM)	Cycles Per Minute with Fan (@ 1750 RPM)	NEMA Frame Size	Based on Add on Inertia (lb-ft) <sup>2</sup>
EUM50-1020W	1/4-3/4	16	125	185	56C/48Y	.02
EUM100-1020W	1	30	90	140	56C/48Y	.05
EUM180-1020W	1-2	30	90	140	182C/143TC	.05
					184C/145TC	
EUM210-1020W	3-5	95	37	48	213/182TC	.19
					215C/184TC	
EUM215-1020W	7-1/2-10	95	37	48	213TC/215TC	.19

## EUM-W-2030 Input Clutch/Brake Combination

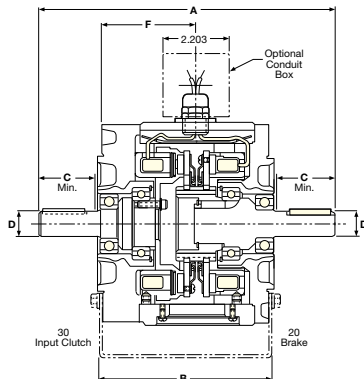

### Base or foot mounted units Dimensions (Inches)

UniModule Size	A	B	C	D	Overall Diameter
50	9.516	5.672	1.813	.625	6.915
180	9.516	6.672	1.890	.875	6.915
210	12.969	8.260	2.500	1.125	10.00

### Available Options

- Conduit box
- Mounting kits
- Integral control

### Specifications

UniModule Model No.	Horsepower	Static Torque (lb-ft)	Cycles Per Minute Standard (@ 1750 RPM)	Cycles Per Minute with Fan (@ 1750 RPM)	NEMA Frame Size	Based on Add on Inertia (lb-ft) <sup>2</sup>
EUM50-2030W	1/4-3/4	16	125	185	56C/48Y	.02
EUM180-2030W	1-2	30	90	140	182C/143TC	.05
					184C/145TC	
EUM210-2030W	3-5	95	37	48	213/182TC	.19
					215C/184TC	

For additional information, refer to catalog P-1234-WE.



**Warner Electric**  
 449 Gardner Street • South Beloit, IL 61080  
 815-389-3771 • Fax: 815-389-2582  
 www.warnerelectric.com  
 An Altra Industrial Motion Company

P-1362-15-WE 9/07  
 Printed in USA